



LPG


STEEL FORKLIIFT



SPECIFICATIONS

MODEL/SIZE (LBS.)	20	33.5	43.5
HEIGHT (IN.)	19.2	26.9	32.8
HEIGHT (MM)	487.7	683	833
LPG CAPACITY (GAL)	4.7	7.9	10.3
LPG CAPACITY (LITER)	17.8	29.9	39
WATER CAPACITY (LBS.)	47.6	80	103.6
WATER CAPACITY (KG)	21.6	36.3	47
NOMINAL TARE WEIGHT (LBS.)	26.5	34.5	40
NOMINAL TARE WEIGHT (KG)	12	15.7	18.1
CYLINDER DIAMETER (IN.)	12.3	12.3	12.3
CYLINDER DIAMETER (MM)	312	312	312
CYLINDER VOLUME (CU. IN.)	1,318	2,214	2,868
CYLINDER VOLUME (LITER)	21.6	36.3	47
COLLAR DIAMETER (IN.)	11.4	11.4	11.4
COLLAR DIAMETER (MM)	290	290	290
COLLAR HEIGHT (IN.)	6.4	6.4	6.4
COLLAR HEIGHT (MM)	163	163	163
FOOTRING DIAMETER (IN.)	9.5	9.5	9.5
FOOTRING DIAMETER (MM)	241	241	241
STANDARD SPECIFICATION	DOT-4BA-240	DOT-4BA-240	DOT-4BA-240

All dimensions are approximate.

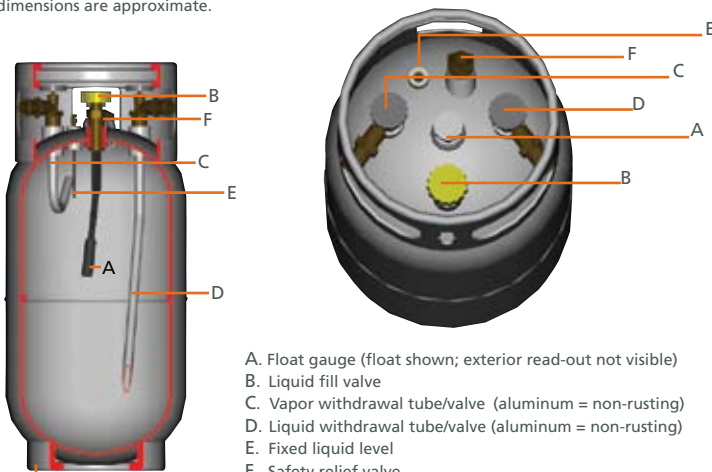

Deep, heavy-duty footing provides the largest clearance in the industry.